

XLSN

Automatic Storage Heater

Installation

Floor standing and fixed to wall via wall fixing bracket.

IP Rating

IPX2.

Cable Entry Point

Bottom right. No cable supplied.

Thermal Cut-out

Bi-metal - manual reset.

Element

Incoloy sheathed in units of 850W.

Construction

Galvanised finish sheet steel base, mounted on steel feet, supporting double skin front and outer panels. One piece front panel / grille assembly.

Controls


Mechanical thermostat.

Colour

White.



This product is not Lot 20 compliant. Replacement model XLE on page 22.

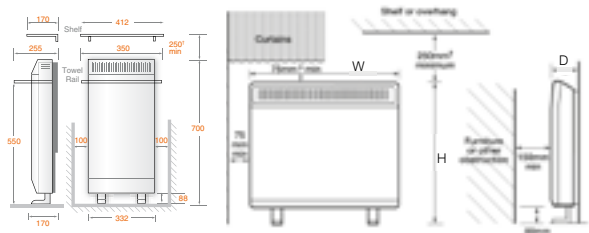

Model	Input (kW)	Height (mm)	Width (mm)	Depth (mm)	Storage bricks required	Weight (kg)	Weight inc.bricks (kg)	Max. storage (kWh)
XLS6N	0.85	700	332	170	4	11	41	5.95
XLS12N	1.7	706	565	146	8	20	76	11.9
XLS18N	2.55	706	793	146	12	26	109	17.85
XLS24N	3.4	706	1021	146	16	32	144	23.8